

A




B

C

D

E

F

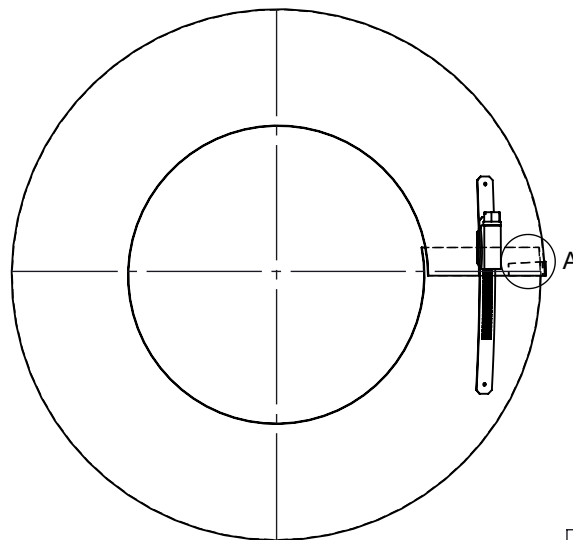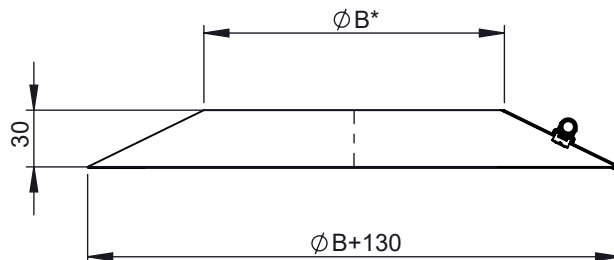


A (1 : 2)

Beispiel für mögliche Materiallösungen	
WGR	MAT
2R2	1.4301(304)-2R(IIID)
2B2	1.4301(304)-2B(IIIC)
2J2	1.4301(304)-2J(GEB)FO
CU	2.0090(SFCU)

*Durchmesser B ist verstellbar,
dadurch kann der Wetterkragen
am Klemmband montiert werden
(Typ ZUAC41)

M 1:6 (Ø150)

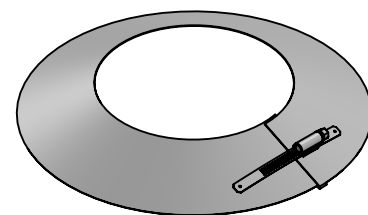

Ø	040	050	060	065	080	095	100	110	115	120	125	130	140	145	150	160	165	170	175
B	40	50	60	65	80	95	100	110	115	120	125	130	140	145	150	160	165	170	175
kg	0,2					0,3		0,4						0,5					
Ø	180	185	190	195	200	205	210	215	220	225	230	235	240	245	250	255	260	265	270
B	180	185	190	195	200	205	210	215	220	225	230	235	240	245	250	255	260	265	270
kg	0,5		0,6										0,7						
Ø	275	280	285	290	295	300	305	310	315	320	325	330	335	340	345	350	360	365	400
B	275	280	285	290	295	300	305	310	315	320	325	330	335	340	345	350	360	365	400
kg	0,7			0,8										0,9					1,0
Ø	415	450	465	480	500	515	550	560	565	600	615	635	650	665	700	715	750	765	800
B	415	450	465	480	500	515	550	560	565	600	615	635	650	665	700	715	750	765	800
kg	1,0	1,1			1,2		1,3			1,4			1,5		1,6		1,7		1,8
Ø	815	850	865	900	915	950	965	1000	1015	1050	1065	1100	1115	1150	1165	1200	1250		
B	815	850	865	900	915	950	965	1000	1015	1050	1065	1100	1115	1150	1165	1200	1250		
kg	1,8	1,9		2		2,1		2,2			2,3		2,4			2,5		2,7	

notes:

DIN ISO 13920 Tolerances B

revisions-no.

A2

mm / kg

date

15.05.2019

name

SME

checked by

approved by

modified by

27.11.2024

SHO

Jeremias
CHIMNEY SYSTEMS

description Wetterkragen / Wandrosette

code WGR-ZUAC31Ø

drawing-no. 01-07-04-5450-000

scale

1:4

format

A4

sheet

1 of 1

